



# VRLA Rechargeable Battery

## HR4.2-12FR

### FEATURES

- Maintenance Free ( topping up not required )
- Non - spillable ( no free acid )
- Low Self Discharge, less than 3% per month
- Both Vertical & Horizontal installations
- Excellent High Rate performance, 30% higher power for 5 to 15min discharge
- Absorbent Glass Mat technology for efficient gas recombination
- Its design life is up to 6 years in floating application
- Reliable Safety Valve in each cell

### APPLICATIONS

- UPS
- Laboratory Equipment
- Power Boosters
- R/C cars & planes
- Emergency Lighting

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (0.20A, 10.5V)	4.0 Ah
	10 Hour Rate (0.38A, 10.5V)	3.8 Ah
	15 Min Rate (101W, 9.6V)	2.1 Ah
	10 Min Rate (132W, 9.6V)	1.8 Ah
Approx. Weight	1395g(3.17lbs.)	
Terminals	T2 (Faston Tab 250) T1 is optional	
Max. Discharge Current	60 A (5 sec.)	
Max. Charge Current	1.2 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 42mΩ ( Fully Charged ) (25°C)	



### CONTAINER MATERIAL

- Flame Retardant ABS(UL94 V-0)
- Model Name: HR4.2-12FR


Certificate as below:

MH19884


Compliance of the standards as below:

- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1
- VdS G121015


OUTER DIMENSIONS	mm(inch)		Length (L)	Width (W)	Container Height (H)	Total Height (TH)
				140±1.5(5.52±0.06)	38.5±1.5(1.52±0.06)	94±1.5(3.70±0.06)

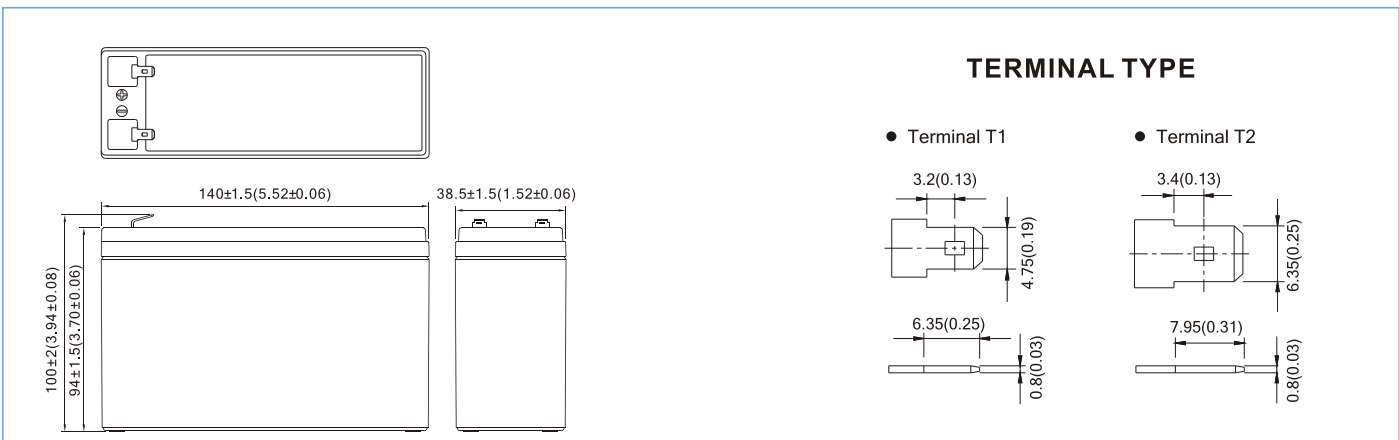

### HR4.2-12FR discharge characteristics (25°C/77°F)

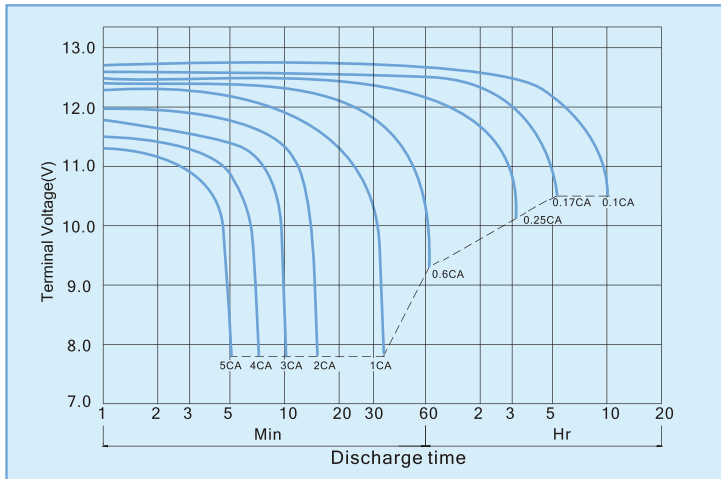


### Battery Charging Characteristics

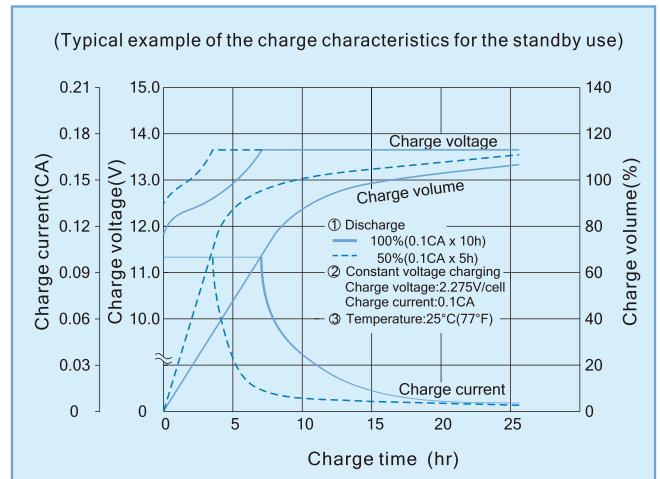

### Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

### Effect Of Temperature On Long Term Float Life

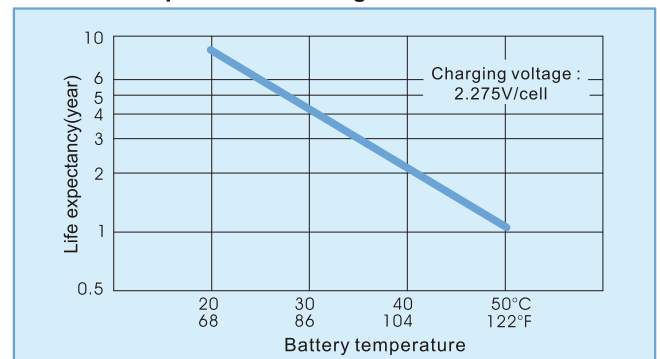

### Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	3Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	241	156.2	112.4	88.9	75.9	57.6	44.3	36.7	32.3	17.8
1.70V	272	186.7	125.5	96.6	80.3	60.0	46.0	37.9	33.1	18.2
1.60V	285	200.0	132.0	101.0	83.3	61.4	47.1	38.7	33.6	18.4
1.50V	291	205.7	134.5	103.2	84.7	62.2	47.7	39.1	33.9	18.5
1.40V	293	209.5	136.3	104.3	85.4	62.7	47.9	39.4	34.2	18.6
1.30V	293	211.4	137.5	105.2	85.9	63.0	48.2	39.6	34.3	18.7

### Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	3 Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	21.1	14.2	9.9	7.69	6.56	4.88	3.73	3.07	2.70	1.48
1.70V	24.3	17.0	11.0	8.36	6.94	5.09	3.87	3.17	2.76	1.52
1.60V	25.6	18.2	11.6	8.74	7.21	5.20	3.96	3.24	2.80	1.53
1.50V	26.2	18.7	11.8	8.93	7.32	5.27	4.01	3.27	2.83	1.54
1.40V	26.5	19.1	12.0	9.03	7.39	5.31	4.03	3.30	2.85	1.55
1.30V	26.5	19.2	12.1	9.10	7.43	5.34	4.06	3.32	2.86	1.56

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

A/2 REV. Jun. 2021

**USA:**  
B&B BATTERY(USA) INC.  
6415 RANDOLPH ST.COMMERCE,CA,90040 U.S.A.  
TEL:1-323-278-1900.1-800-278-8599  
FAX:1-323-278-1268  
E-Mail:sales@bb-battery.com

**CHINA FACTORY:**  
B.B. TECH(CHANGSHA) CO., LTD.  
No.57 DongsiRoad, Changsha National Economic & Technical Development Zone, Changsha, Hunan PRC  
TEL:86-731-82955888  
FAX:86-731-82955111  
E-Mail:maggy@bb-battery.com

**EUROPE:**  
B&B BATTERY(EUROPE) B.V.  
SUITE 8, HAAKSBERGWEG 33, 1101  
BP AMSTERDAM,THE NETHERLANDS  
TEL: 31-30-320-0190  
MOBILE: 852-9128-2711  
E-Mail: dliu@bb-battery.com

**HONG KONG:**  
B&B BATTERY(Hong Kong) Co.  
TEL:852-2311-4918  
FAX:852-2739-1182  
E-Mail:bbhk@hkstar.com

**JAPAN:**  
B&B BATTERY(JAPAN) CO., LTD.  
1375-11 NARAHARA-MACHI,HACHIOJI,  
TOKYO 193-0803,JAPAN.  
TEL:81-426-25-6375  
FAX:81-426-25-6375  
E-Mail:miyata@bb-battery.com

**TAIWAN:**  
B.B. BATTERY(TAIWAN) CO., LTD.  
TEL:886-6-502-5150  
FAX:886-6-589-8087  
E-Mail:kevinlin@bb-battery.com