

### Technical data

#### General

Nominal voltage	6 V (3 cells per unit)
Length	296 mm
Width	176 mm
Height	366 mm
Container Height	343 mm
Approx. Weight	42 kg
Terminal	ELPT
Handle	Yes
Container material	PP


#### Electric specifications

Rated capacity C5 to 1,70 VpC	271 Ah
Rated capacity C20 to 1,75 VpC	330 Ah
Reserve capacity @25 A	711 min
Reserve capacity @56 A	-
Reserve capacity @75 A	195 min

#### Temperature range

Charge/discharge	-20 - 45 °C
Storage	-15 - 40 °C
Self discharge	5-15 % per month

#### Battery charge conditions at 25 °C

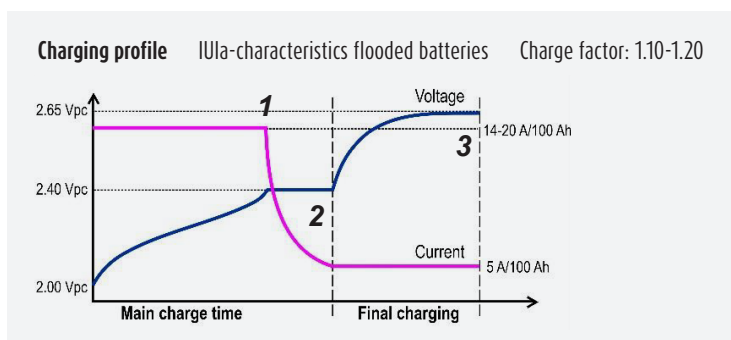




#### Capacity affected by temperature

40 °C	102 %
25 °C	100 %
0 °C	85 %
-15 °C	65 %




- Dimensions according to international standards
- Accurately selected products
- High cycle resistance
- Equivalent to TROJAN

#### Dimensions

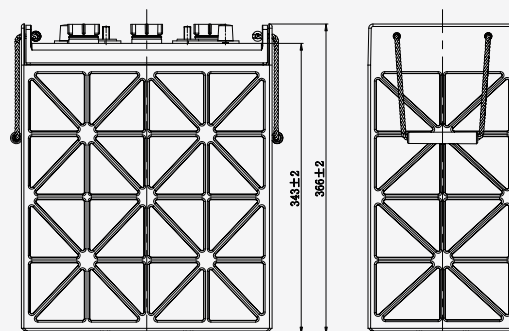

POS



NEG